



FALCON

Ladder & Scaffold Mfg.

1671A Cary Road, Kelowna, B.C. V1X 2C1
Phone: (250) 861-9556 Fax: (250) 861-9553

EXTENSION LADDER POLE GRIP – INSTALLATION INSTRUCTIONS

Hardware needed:


- 4x ¼" x 1" Machine Screw
- 4x ¼" Washer
- 4x ¼" Nylock Nut

Tools needed:


- Safety Glasses
- 1x Drill
- 1x ¼" Drill Bit
- 1x 7/16" Wrench
- 1x Flat screw driver
- 1x Marker

Installation Instructions:

- 1) Identify the base section and fly section on your ladder.
- 2) Remove the **back** rivet of the fly section (circled in blue) which is holding the plastic cap of the ladder, by drilling away the head of the rivet, using the drill and the ¼" drill bit.
- 3) Using the mounting bracket as a guide, mark the position of the second hole (both holes are to be collinear). Then, using the drill and the ¼" drill-bit, drill the marked-hole. (shown in green).
- 4) Repeat the steps 2 & 3 on the other side of the fly section.

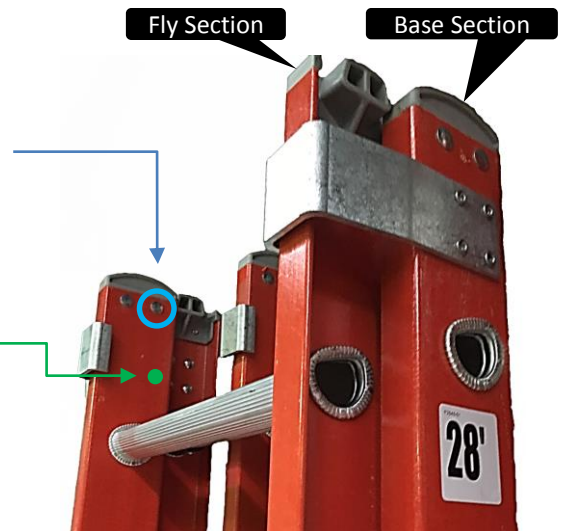

- 5) Mount the pole grip using the screws, washers, nuts and brackets, on both sides of the fly section. **Do no tighten yet!**
*** Please note that the 2-pieces of rubber-belt, which are riveted to the yellow strap and are meant to grab the actual pole, must be facing towards the back of the ladder.

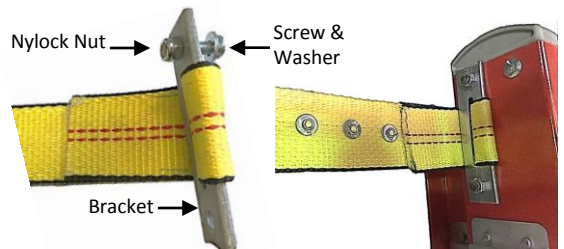

- 6) Tighten the strap to the desired tension. Tight-fit is recommended for most of ladder series.
- 7) Finally, tighten the nuts and screws. Minimum 2 threads must pass after the nylon insert on the washer in order to prevent the screw from un-screwing on its own due to use and vibrations.



Questions?, feel free to contact us, one of our Customer Service Representatives would be happy to assist you.

1-800-522-3313 info@falconladder.com